

Absolute encoders – multiturn

**Standard
mechanical multiturn, optical**

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift



The Sendix multiturn encoders 5868 and 5888 with CANopen or CANopenLift interface and optical sensor technology are the right encoders for all CANopen or CANopenLift applications.

With a maximum resolution of 28 bits these encoders offer an optional additional RS422 incremental track with 2048 pulses.



CANopen

**CANopen
LIFT**



Mechanical drive



Safety-Lock™



High rotational speed



Temperature range
-40°...+80°C



High protection level
IP



High shaft load capacity



Magnetic field proof sensor technology



Shock / vibration resistant



Reverse polarity protection



SinCos

Reliable

- Tried-and-tested in applications with the highest demands, such as in mobile automation or medical technology.
- Ideal for use outdoors thanks to IP67 protection and wide temperature range from -40 °C up to +80 °C.

Flexible

- Node address can be set via rotary switches or software.
- Baud rate and termination can be set via DIP switches or software.
- With bus terminal cover or fixed connection, as well as M12 connectors or cable connection.
- Universal scaling function.

Order code Shaft version

8.5868

Type

. XXXX . XXXX

a

b

c

d

e

f

a Flange

- 1 = clamping flange, IP65 ø 58 mm [2.28"]**
 3 = clamping flange, IP67 ø 58 mm [2.28"]
2 = synchro flange, IP65 ø 58 mm [2.28"]
 4 = synchro flange, IP67 ø 58 mm [2.28"]
 5 = square flange, IP65 □ 63.5 mm [2.5"]
 7 = square flange, IP67 □ 63.5 mm [2.5"]

b Shaft (ø x L), with flat

- 1 = 6 x 10 mm [0.24 x 0.39"]¹⁾**
2 = 10 x 20 mm [0.39 x 0.79"]²⁾
 3 = 1/4" x 7/8"
 4 = 3/8" x 7/8"

c Interface / power supply

- 2 = CANopen DS301 V4.02, 10 ... 30 V DC**
5 = CANopen DS301 V4.02, 10 ... 30 V DC
 with 2048 ppr incremental track (TTL-compatible)³⁾

d Type of connection

removable bus terminal cover

- 1 = radial cable gland
2 = 2 x or 3 x M12 connector, 5-pin
 Fixed connection without bus terminal cover
 A = radial cable, 2 m [6.56'] PVC
 B = radial cable, special length PVC *)
 E = 1 x radial M12 connector, 5-pin
 F = 2 x radial M12 connector, 5-pin
 I = 1 x radial M23 connector, 12-pin
 J = 2 x radial M23 connector, 12-pin
 K = 1 x Sub-D connector, 9-pin

*) Available special lengths (connection type B):
 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21']
 order code expansion .XXXX = length in dm
 ex.: 8.5868.112B.2123.0030 (for cable length 3 m)

Optional on request

- Ex 2/22⁴⁾
- surface protection salt spray tested
- seawater resistant (stainless steel V4A)

Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)



salt spray tested:
 8.5868.3222.2122-C



stainless steel V4A:
 8.5868.3222.2122-V4A

e Fieldbus profile

- 212 = CANopen**
 221 = CANlift DS417 V1.01

f Options (service)

- 2 = no options
3 = SET button

1) Preferred type only in conjunction with flange type 2.

2) Preferred type only in conjunction with flange type 1.

3) Only in conjunction with connection type 2.


4) For the cable connection type, cable material PUR.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	CANopen/CANopenLift
---	--	----------------------------

Order code Hollow shaft	8.5888 Type	.XXXXX.XXX a b c d e f
a Flange 1 = with spring element, long, IP65 2 = with spring element, long, IP67 3 = with stator coupling, IP65 ø 65 mm [2.56"] 4 = with stator coupling, IP67 ø 65 mm [2.56"] 5 = with stator coupling, IP65 ø 63 mm [2.48"] 6 = with stator coupling, IP67 ø 63 mm [2.48"]	d Type of connection removable bus terminal cover 1 = radial cable gland 2 = 2 x or 3 x M12 connector, 5-pin Fixed connection without bus terminal cover A = radial cable, 2 m [6.56'] PVC B = radial cable, special length PVC *) E = 1 x radial M12 connector, 5-pin F = 2 x radial M12 connector, 5-pin I = 1 x radial M23 connector, 12-pin J = 2 x radial M23 connector, 12-pin K = 1 x Sub-D connector, 9-pin *) Available special lengths (connection type B): 3, 5, 8, 10, 15 m [9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.5888.542B.2123.0030 (for cable length 3 m)	e Fieldbus profile 212 = CANopen 221 = CANlift DS417 V1.01 f Options (service) 2 = no options 3 = SET button
b Blind hollow shaft (insertion depth max. 30 mm [1.18"]) 3 = ø 10 mm [0.39"] 4 = ø 12 mm [0.47"] 5 = ø 14 mm [0.55"] 6 = ø 15 mm [0.59"] 8 = ø 3/8" 9 = ø 1/2"	c Interface / power supply 2 = CANopen DS301 V4.02, 10 ... 30 V DC 5 = CANopen DS301 V4.02, 10 ... 30 V DC with 2048 ppr incremental track (TTL-compatible) ¹⁾	Optional on request - Ex 2/22 ²⁾ - surface protection salt spray tested - seawater resistant (stainless steel V4A) Salt spray tested / stainless steel V4A as standard types (deliverable as from 1 unit)  salt spray tested: 8.5888.2422.2122-C 8.5888.2522.2122-C  V4A 1.4404 stainless steel V4A: 8.5888.2422.2122-V4A

Mounting accessory for shaft encoders		Order no
Kupplung	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"]	8.0000.1102.0606
	bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	8.0000.1102.1010

Mounting accessory for hollow shaft encoders		Dimensions in mm [inch]	Order no
Torque pin, ø 4 mm for flange with spring element (flange type 1 + 2)	with fixing thread		8.0010.4700.0000

Cables and connectors			Order no
Preassembled cables	M12 female connector with coupling nut, 5-pin, A coded, straight single-ended 5 m [16.40'] PVC cable	bus in	05.00.6091.A211.005M
	M12 male connector with external thread, 5-pin, A coded, straight single-ended 5 m [16.40'] PVC cable	bus out	05.00.6091.A411.005M
Connectors	M12 female connector with coupling nut, 5-pin, A coded, straight (metal)	bus in	8.0000.5116.0000
	M12 female connector with coupling nut, 5-pin, B coded, straight (metal)	incremental track	05.BMWS 8151-8.5
	M12 male connector with external thread, 5-pin, A coded, straight (metal)	bus out	8.0000.5111.0000

Further Kübler accessories can be found at: kuebler.com/accessories
Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

1) Only in conjunction with connection type 2.
2) For the cable connection type, cable material PUR.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	CANopen/CANopenLift
---	--	----------------------------

Technical data

Mechanical characteristics			Interface characteristics CANopen/CANopenLift		
Maximum speed			Resolution singleturn (MUR)		
	IP65 up to 70 °C [158 °F]	9000 min ⁻¹ , 7000 min ⁻¹ (continuous)		scalable	1 ... 65 536 (16 bit)
	IP65 up to T _{max}	7000 min ⁻¹ , 4000 min ⁻¹ (continuous)		default	8 192 (13 bit)
	IP67 up to 70 °C [158 °F]	8000 min ⁻¹ , 6000 min ⁻¹ (continuous)	Number of revolutions (NDR)		
	IP67 up to T _{max}	6000 min ⁻¹ , 3000 min ⁻¹ (continuous)			1 ... 4 096 (12 bit) scalable only via the total resolution
Starting torque - at 20 °C [68 °F]			Total resolution (TMR)		
	IP65	< 0.01 Nm		scalable	1 ... 268 435 456 (28 bit)
	IP67	< 0.05 Nm		default	33 554 432 (25 bit)
Mass moment of inertia			Interface		
	shaft version	4.0 x 10 ⁻⁶ kgm ²			
	hollow shaft version	7.5 x 10 ⁻⁶ kgm ²			
Load capacity of shaft			Protocol		
	radial	80 N			
	axial	40 N			
Weight			Baud rate		
	with bus terminal cover	approx. 0.57 kg [20.11 oz]			
	with fixed connection	approx. 0.52 kg [18.34 oz]			
Protection acc. to EN 60529			Node address		
	housing side	IP67			
	shaft side	IP65, opt. IP67			
Working temperature range			Termination switchable		
		-40 °C ... +80 °C [-40 °F ... +176 °F] ¹⁾			
Material					
	shaft/hollow shaft	stainless steel			
	flange	aluminum			
	housing	zinc die-cast			
	cable	PVC (PUR for Ex 2/22)			
Shock resistance acc. to EN 60068-2-27					
		2500 m/s ² , 6 ms			
Vibration resistance acc. to EN 60068-2-6					
		100 m/s ² , 55 ... 2000 Hz			

Electrical characteristics			Approvals		
Power supply			UL compliant in accordance with		
		10 ... 30 V DC			
Power consumption (no load)			CE compliant in accordance with		
		max. 100 mA			
Reverse polarity protection of the power supply				EMC Directive	2014/30/EU
		yes		RoHS Directive	2011/65/EU
				ATEX Directive	2014/34/EU (for Ex 2/22 variants)

Incremental track characteristics		
Output driver		
		RS422 (TTL-compatible)
Permissible load / channel		
		max. +/- 20 mA
Signal level		
	HIGH	typ. 3.8 V
	LOW	typ. 1.3 V
Short circuit proof outputs		
		yes ²⁾
Resolution		
		2048 ppr

SET button (zero or defined value, option)
Protection against accidental activation. Button can only be operated with a ball-pen or pencil.

Diagnostic LED (yellow)
LED is ON with the following fault conditions
Sensor error (internal code or LED error) too low voltage, over-temperature

1) Cable version: -30 °C ... +75 °C [-22 °F ... +167 °F].

2) Short circuit to 0 V or to output, only one channel at a time, power supply correctly applied.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	CANopen/CANopenLift
---	---	---------------------

General information about CANopen / CANopenLift

The CANopen encoders support the latest CANopen communication profile according to DS301 V4.02. In addition, device specific profiles such as encoder profile DS406 V3.2 and DS417 V1.1 (for lift applications) are available

The following operating modes may be selected: Polled Mode, Cyclic Mode, Sync Mode. Moreover, scale factors, preset values, limit switch values and many other additional parameters can be programmed via the CAN bus.

When switching the device on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure.

The following output values may be combined in a freely variable way as PDO (PDO mapping): position, speed, acceleration as well as the status of the working area.

As competitively priced alternatives, encoders are also available with a connector or a cable connection, where the device address and baud rate can be changed and configured by means of the software. The models with bus terminal cover and integrated T-coupler allow for extremely simple installation: the bus and power supply can be easily connected via M12 connectors. The device address can be set via 2 rotary hex switches. Furthermore, another DIP switch allows for the setting of the baud rate and switching on a termination resistor. Three LEDs located on the back indicate the operating or fault status of the CAN bus, as well as the status of an internal diagnostic.

Universal Scaling Function

At the end of the physical resolution of an encoder, **when scaling is active**, an error appears if the division of the physical limit (GP_U) by the programmed total resolution (TMR) does not produce an integer.

The Universal Scaling Function remedies this problem.

CANopen communication profile DS301 V4.02

Among others, the following functionality is integrated.

- Class C2 functionality.
- NMT slave.
- Heartbeat protocol.
- High resolution sync protocol.
- Identity object.
- Error behavior object.
- Variable PDO mapping.
- Self-start programmable (power on to operational).
- 3 Sending PDO's.
- Node address, baud rate and CANbus.
- Programmable termination.

CANopen Encoder Profile DS406 V3.2

The following parameters can be programmed:

- Event mode.
- Units for speed selectable (steps/sec or min⁻¹).
- Factor for speed calculation (e.g. circumference of measuring wheel).
- Integration time for the speed value from 1 ... 32.
- 2 working areas with 2 upper and lower limits and the corresponding output states.
- Variable PDO mapping for position, speed, work area status.
- Extended failure management for position sensing with integrated temperature control.
- User interface with visual display of bus and failure status - 3 LED's.
- Optional - 32 CAMs programmable.
- Customer-specific memory - 16 Bytes.

CANopen Lift Profile DS417 V1.1

Among others, the following functionality is integrated:

- Car position unit.
- 2 virtual devices.
- 1 virtual device delivers the position in absolute measuring steps (steps).
- 1 virtual device delivers the position as an absolute travel information in mm.
- Lift number programmable.
- Independent setting of the node address in relation with the CAN identifier.
- Factor for speed calculation (e.g. measuring wheel periphery).
- Integration time for speed value of 1...32.
- 2 work areas with 2 upper and lower limits and the corresponding output states.
- Variable PDO mapping for position, speed, acceleration, work area status.
- Extended failure management for position sensing with integrated temperature control.
- User interface with visual display of bus and failure status - 3 LED's.
- "Watchdog controlled" device.

All profiles stated here: Key-features

The object 6003h "Preset" is assigned to an integrated key, accessible from the outside.

Absolute encoders – multiturn

Standard mechanical multiturn, optical	Sendix 5868 / 5888 (shaft / hollow shaft)	CANopen/CANopenLift
---	--	----------------------------

Terminal assignment

Interface	Type of connection	Cable gland (bus terminal cover with terminal box)									
2, 5	1	Signal:	Bus OUT					Bus IN			
			CAN_GND	CAN_L	CAN_H	0 V power supply	+V power supply	0 V power supply	+V power supply	CAN_L	CAN_H
		Abbreviation:	CG	CL	CH	0 V	+V	0 V	+V	CL	CH

Interface	Type of connection	Cable (isolate unused cores individually before initial start-up)									
2, 5	A, B	Signal:	Bus IN								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Core color:	WH	BN	YE	GN	GY				

Interface	Type of connection	2 x M12 connector, 5-pin (3 x M12 connector with interface 5)									
2, 5	2, F	Signal:	Bus OUT								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Pin:	3	2	5	4	1				
		Signal:	Bus IN								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Pin:	3	2	5	4	1				
5	2	Signal:	Incremental track								
			A	$\bar{A}$	B	$\bar{B}$	0 V				
		Pin:	1	2	3	4	5				

Interface	Type of connection	1 x M12 connector, 5-pin									
2, 5	E	Signal:	Bus IN								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Pin:	3	2	5	4	1				

Interface	Type of connection	2 x M23 connector, 12-pin									
2, 5	J	Signal:	Bus OUT								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Pin:	10	12	2	7	3				
		Signal:	Bus IN								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Pin:	10	12	2	7	3				

Interface	Type of connection	1 x M23 connector, 12-pin									
2, 5	I	Signal:	Bus IN								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Pin:	10	12	2	7	3				

Interface	Type of connection	Sub-D connector, 9-pin									
2, 5	K	Signal:	Bus IN								
			0 V power supply	+V power supply	CAN_L	CAN_H	CAN_GND				
		Pin:	6	9	2	7	3				

Absolute encoders – multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions shaft version, with removable bus terminal cover



Dimensions in mm [inch]

Clamping flange, Ø 58 [2.28]

Flange type 1 and 3

(drawing with 2 x M12 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep

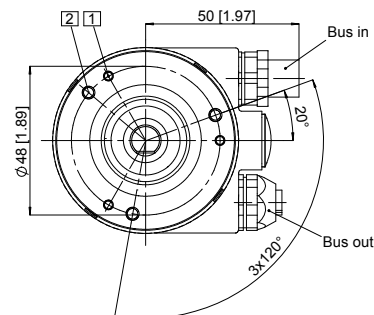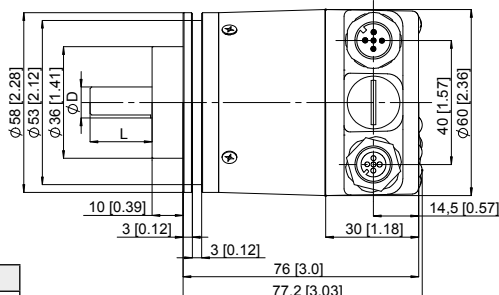



D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Synchro flange, Ø 58 [2.28]

Flange type 2 and 4

(drawing with cable)

- 1 3 x M4, 6 [0.24] deep


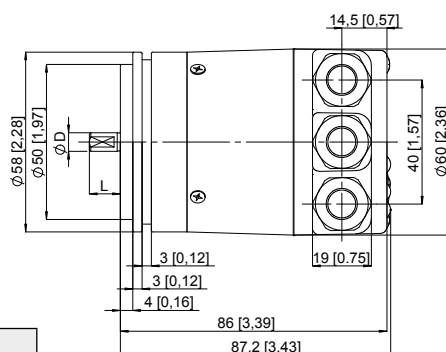


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Square flange, □ 63.5 [2.5]

Flange type 5 and 7

(drawing with cable)

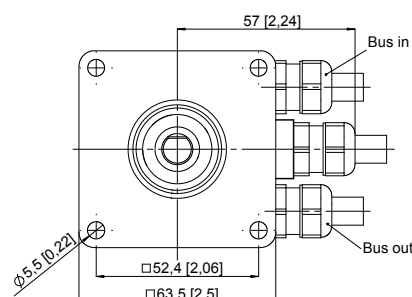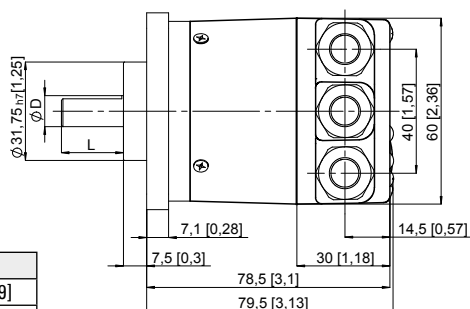

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Absolute encoders – multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions shaft version, with fixed connection



Dimensions in mm [inch]

Synchro flange, $\varnothing$ 58 [2.28]

Flange type 2 and 4

(drawing with M23 connector)

1 3 x M4, 6 [0.24] deep

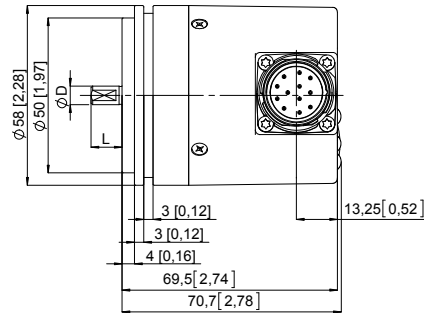

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"



Synchro flange, $\varnothing$ 58 [2.28]

Flange type 2 and 4

(drawing with Sub-D connector)

1 3 x M4, 6 [0.24] deep

2 2 x 4/40 UNC; 3.0 [0.12] deep


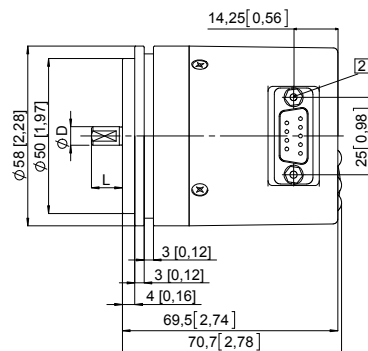


D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Square flange, $\square$ 63.5 [2.5]

Flange type 5 and 7

(drawing with 2 x M23 connector)

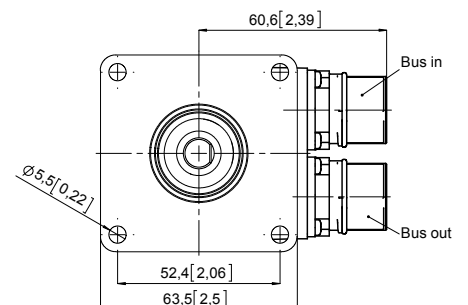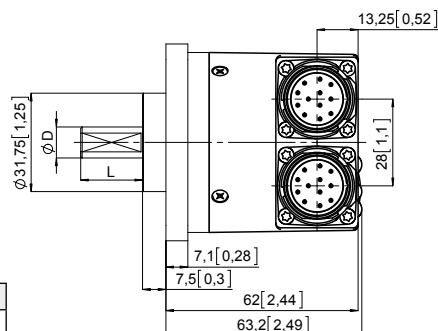

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Absolute encoders – multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions shaft version, with fixed connection



Dimensions in mm [inch]

Clamping flange, $\varnothing$ 58 [2.28]

Flange type 1 and 3

(drawing with 1 x M12 connector)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep

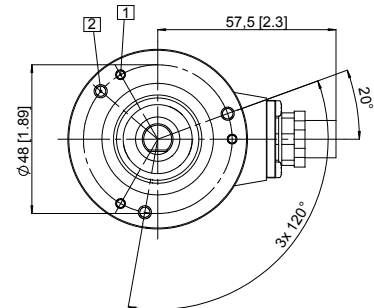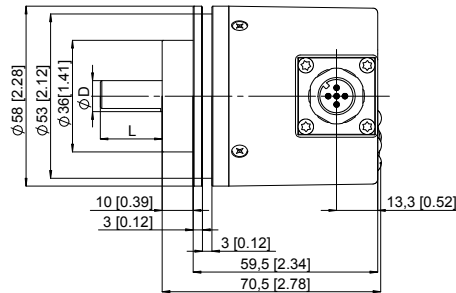



D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Synchro flange, $\varnothing$ 58 [2.28]

Flange type 2 and 4

(drawing with 2 x M12 connector)

- 1 3 x M4, 8 [0.32] deep

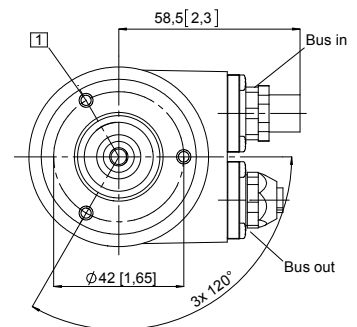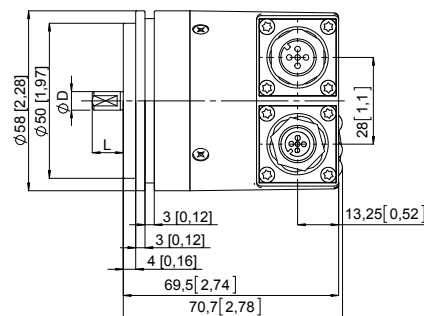



D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Clamping flange, $\varnothing$ 58 [2.28]

Flange type 1 and 3

(drawing with cable)

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep

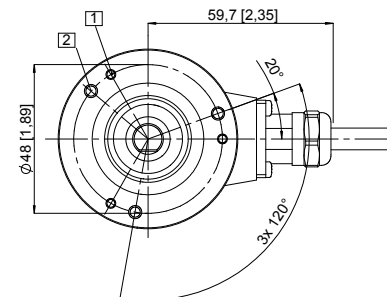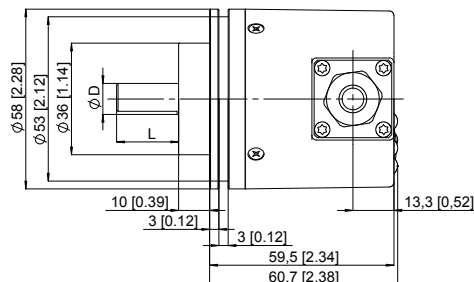

D	Fit	L
6 [0.24]	h7	10 [0.39]
10 [0.39]	f7	20 [0.79]
1/4"	h7	7/8"
3/8"	h7	7/8"

Absolute encoders – multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions hollow shaft version (blind hollow shaft), with removable bus terminal cover



Dimensions in mm [inch]

Flange with spring element, long

Flange type 1 and 2

(drawing with 2 x M12 connector)

- 1 Slot spring element
recommendation:
torque pin DIN 7, $\varnothing$ 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the
clamping ring 0.6 Nm

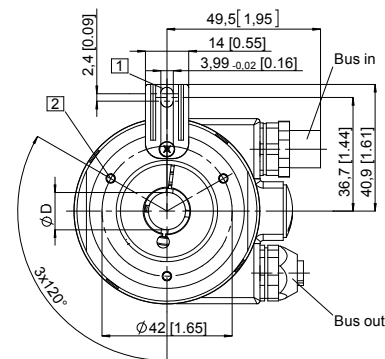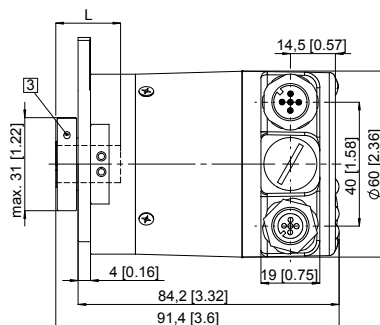

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft



Flange with stator coupling, $\varnothing$ 63 [2.48]

Flange type 5 and 6

Pitch circle diameter for fixing screws
63 [2.48]

(drawing with cable)

- 1 Recommended torque for the
clamping ring 0.6 Nm

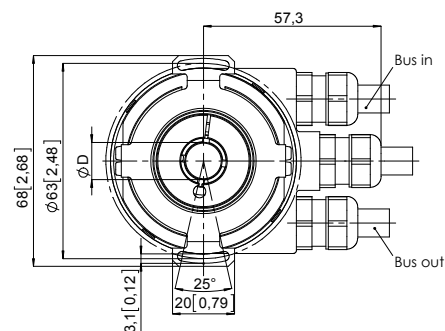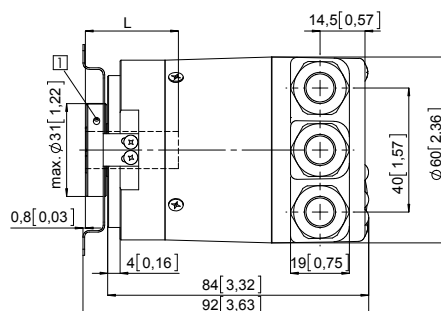

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft



Flange with stator coupling, $\varnothing$ 65 [2.56]

Flange type 3 and 4

Pitch circle diameter for fixing screws
65 [2.56]

(drawing with 2x M12 connector)

- 1 Recommended torque for the
clamping ring 0.6 Nm

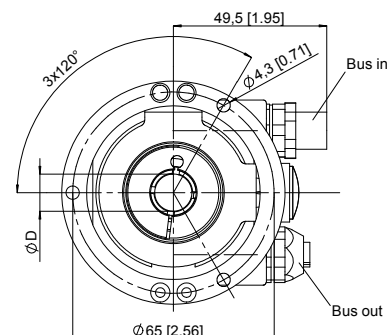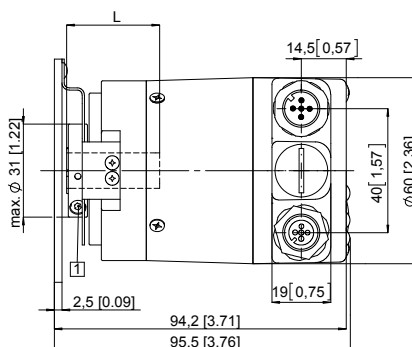

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

Absolute encoders – multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions hollow shaft version (blind hollow shaft), with fixed connection

Dimensions in mm [inch]

Flange with spring element, long



Flange type 1 and 2

(drawing with M23 connector)

- 1 Slot spring element
recommendation:
torque pin DIN 7, $\varnothing$ 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 Recommended torque for the
clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

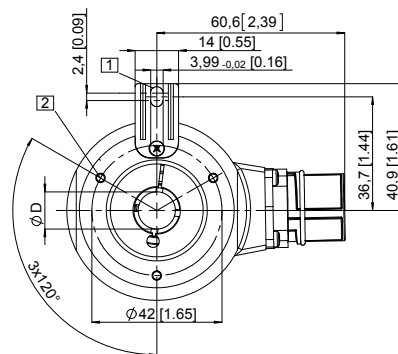

Flange with spring element, long



Flange type 1 and 2

(drawing with Sub-D connector)

- 1 Slot spring element
recommendation:
torque pin DIN 7, $\varnothing$ 4 [0.16]
- 2 3 x M3, 5.5 [0.22] deep
- 3 2 x 4/40 UNC; 3.0 [0.12] deep
- 4 Recommended torque for the
clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

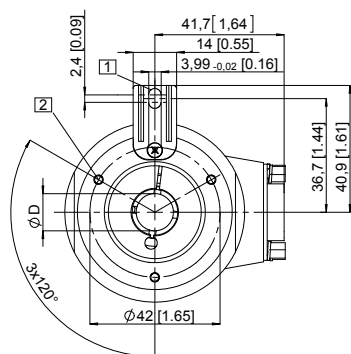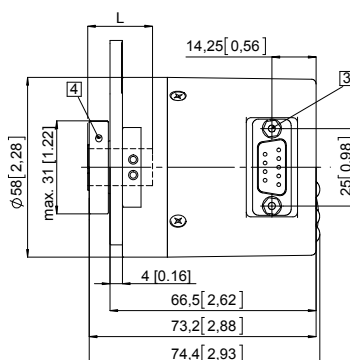

Flange with stator coupling, $\varnothing$ 65 [2.56]

Flange type 3 and 4



Pitch circle diameter for fixing screws
65 [2.56]

(drawing with 2 x M23 connector)

- 1 Recommended torque for the
clamping ring 0.6 Nm

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

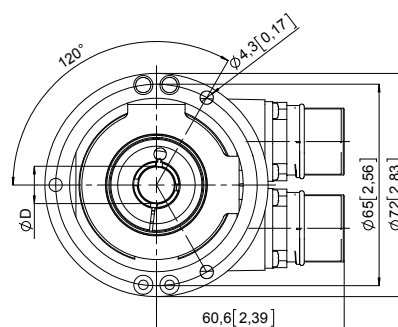

Absolute encoders – multiturn

Standard mechanical multiturn, optical

Sendix 5868 / 5888 (shaft / hollow shaft)

CANopen/CANopenLift

Dimensions hollow shaft version (blind hollow shaft), with fixed connection

Dimensions in mm [inch]

Flange with stator coupling, ø 63 [2.48]



Flange type 5 and 6

Pitch circle diameter for fixing screws

63 [2.48]

(drawing with M12 connector)

- 1 Recommended torque for the clamping ring 0.6 Nm

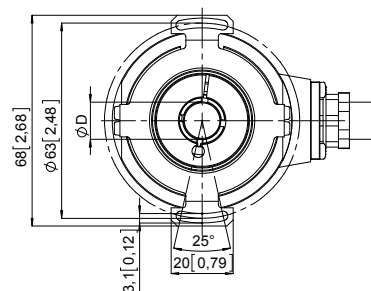

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]



L = insertion depth max. blind hollow shaft

Flange with spring element, long

Flange type 1 and 2

(drawing with 2 x M12 connector)

- 1 Slot spring element recommendation: torque pin DIN 7, ø 4 [0.16]
 2 3 x M3, 5.5 [0.22] deep
 3 Recommended torque for the clamping ring 0.6 Nm

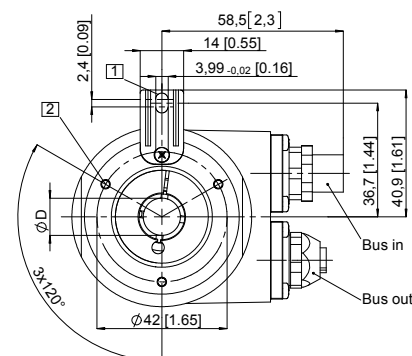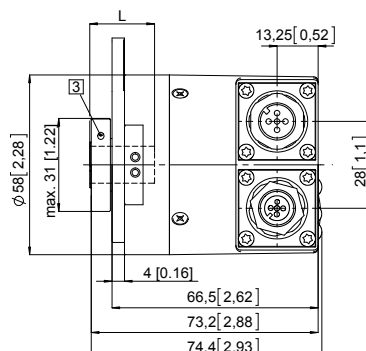

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft

Flange with stator coupling, ø 65 [2.56]



Flange type 3 and 4

Pitch circle diameter for fixing screws

65 [2.56]

(drawing with cable)

- 1 Recommended torque for the clamping ring 0.6 Nm

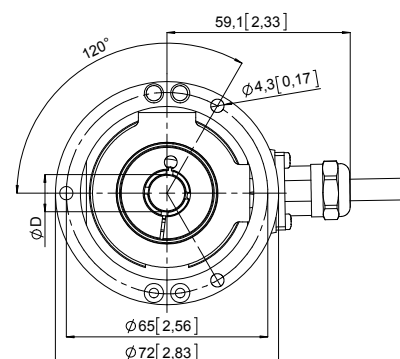

D	Fit	L
10 [0.39]	H7	30 [1.18]
12 [0.47]	H7	30 [1.18]
14 [0.55]	H7	30 [1.18]
15 [0.59]	H7	30 [1.18]
3/8"	H7	30 [1.18]
1/2"	H7	30 [1.18]

L = insertion depth max. blind hollow shaft